JAMECO®
ELECTRONIC COMPONENTS
COMPUTER PRODUCTS

1355 Shoreway Rd., Belmont, CA 94002
Tel: (415) 562-8097 Fax: (415) 592-2503
BBS: (415) 637-9025 Internet: http://www.jameco.com info@jameco.com

Cliplite T1 ¾ Lens

Part No. 143132, 143141, 143159, 143167

- For use with part no. 143061, 143044, 143036, 143028 (Low Profile Lens)
- For use with part no. 143124, 143239 (Retaining LED Rings)

DESIGN: Low profile lenses with fresnel rings.

MOUNTING: Mounts thru front of panel, retaining ring secures the lens in place.

5mm (CMC 321), mounts in a 9/32" (7.2mm) hole on 3/8" centers. Panel thickness 1/32" to 1/8".

INSTALLATION – CLIPLITE is inserted thru panel opening, retaining ring pressed into place. PCB mounted LEDs slide into lenses when the panel cover is closed or the PCB card is inserted into the case.

OUTLINE DRAWINGS

CMC 321 (5mm)

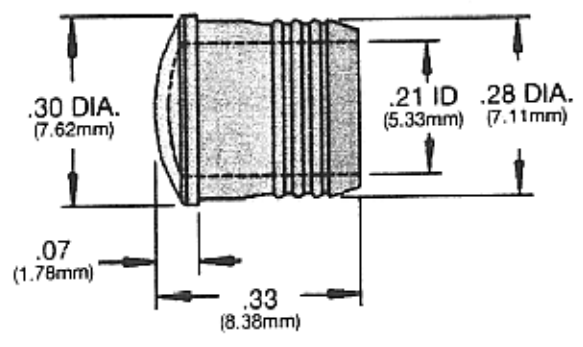

RNG 234 (5mm)

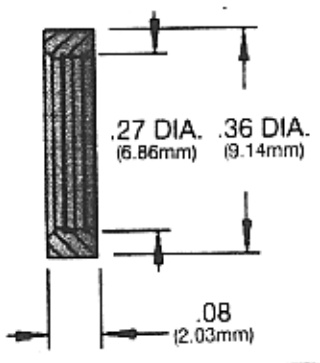

PANEL MOUNTED LENS WITH PCB MOUNTED LED

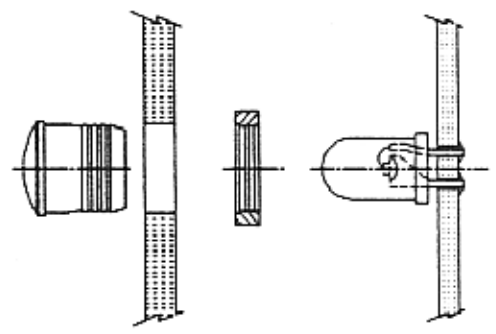

Install lens thru panel, secure with retaining ring. The PCB mounted LED then slides into lens.

PANEL MOUNTED LENS WITH CONXRITE CONNECTOR

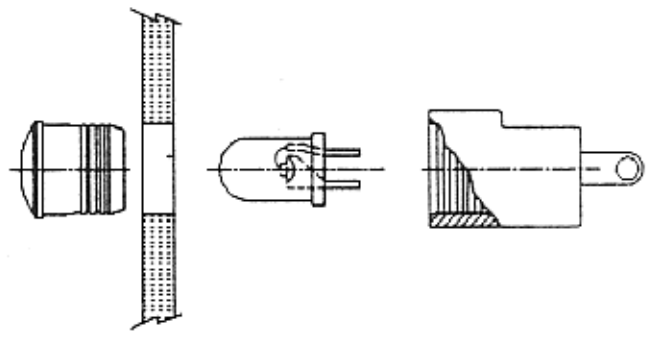

Install lens thru panel, insert LED into connector, press connector on to lens to complete installation.